



DOLPHIN

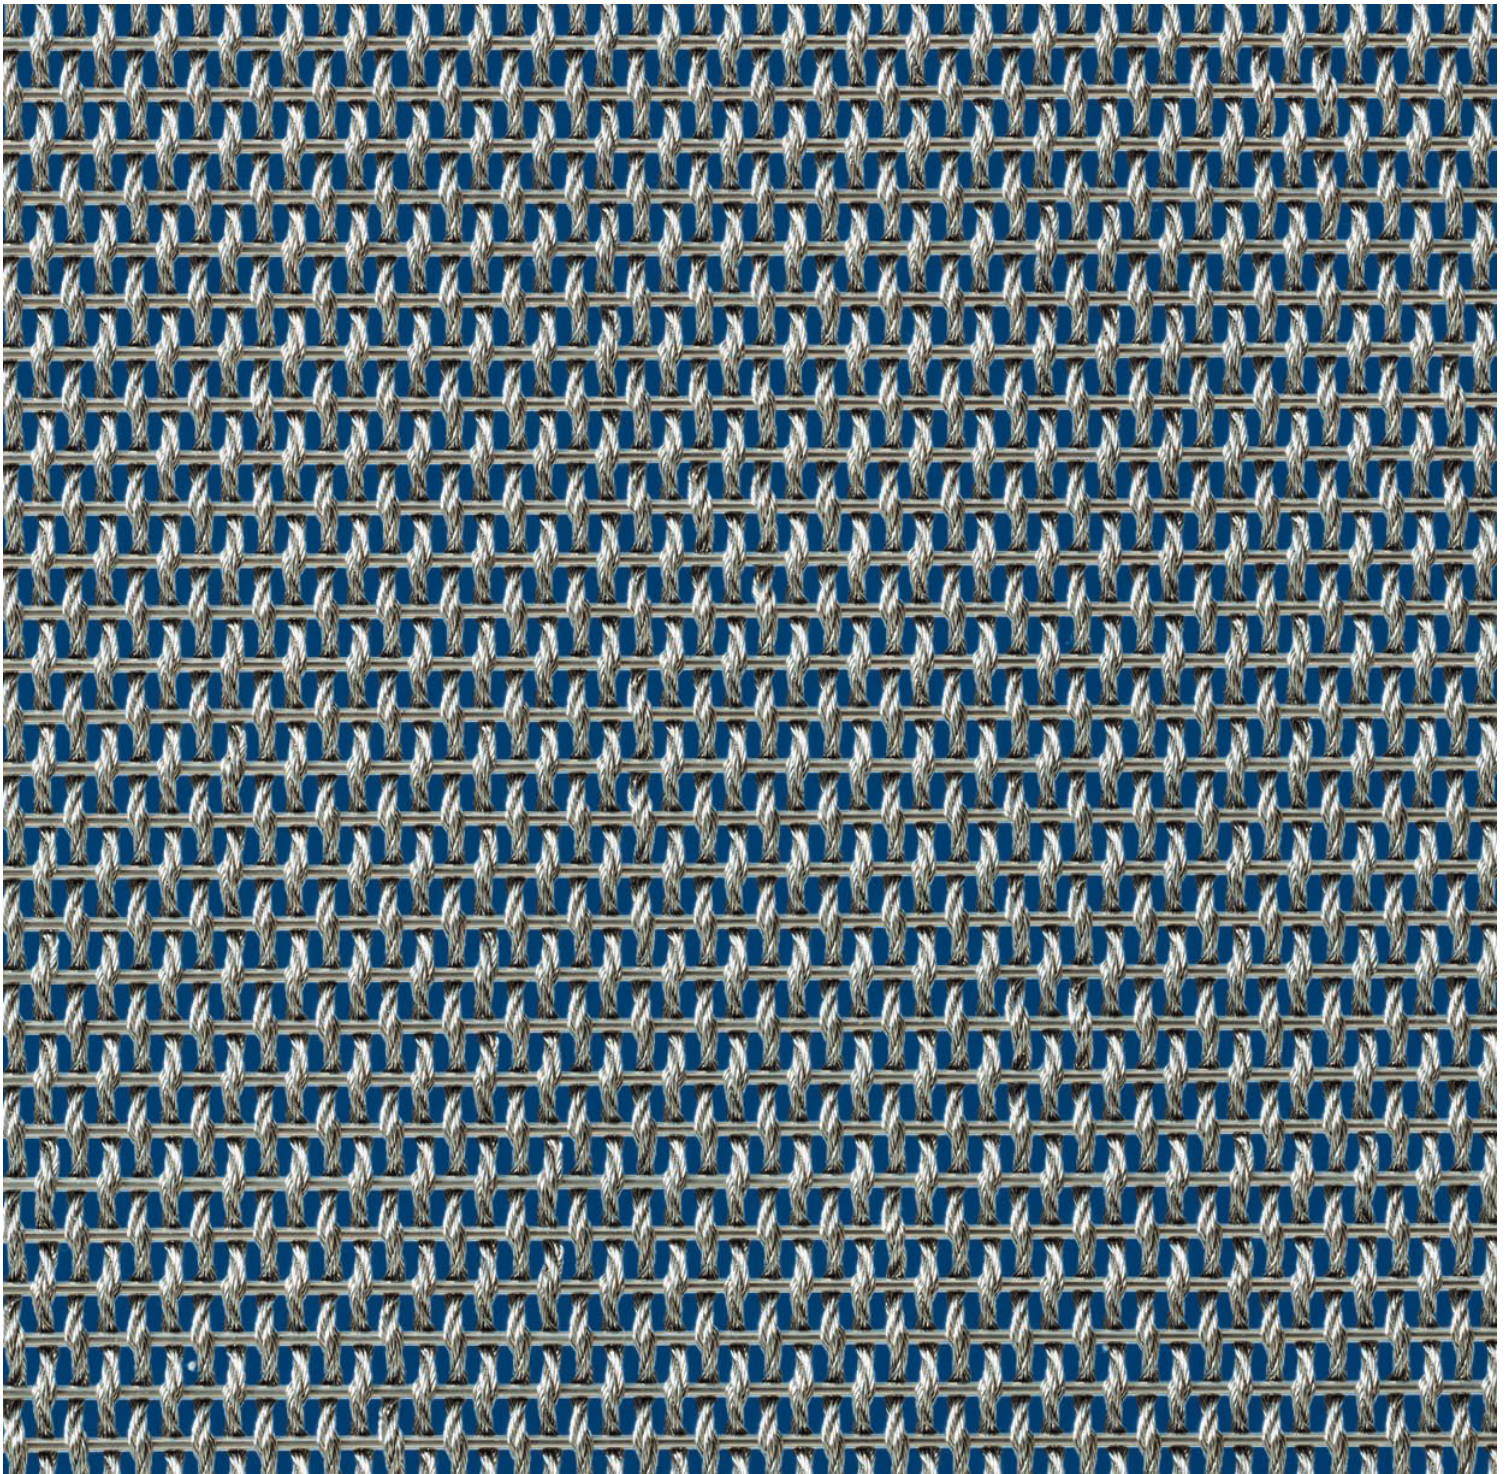

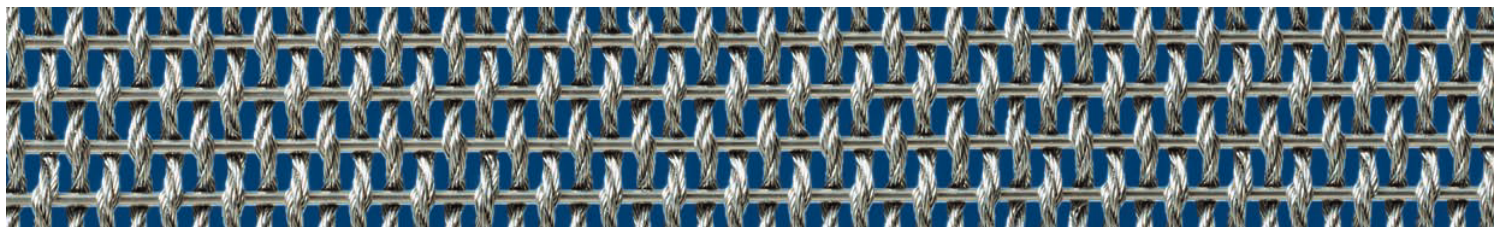

M=1:1

DOLPHIN

TECHNISCHE DATEN

TECHNICAL DATA SHEET | FICHE TECHNIQUES | INFORMACIÓN TÉCNICA

Werkstoff Material Matériau Material	Edelstahl 1.404 (AISI 316L) Stainless steel Acier inoxydable Acero inoxidable	
Freie Fläche Open area Surface ouverte Superficie abierta	ca. 31 %	
Drahtstärke Wire diameter Diamètre des fils Diametro de hilos	Kettseil: 1,8 mm Cable Câble Cable	Schussstab: 1,5 mm Rod Tringle Varilla
Teilung Kettseil Cable pitch Entraxe câbles Paso cables	3,2 mm	
Teilung Schuss Weft wire pitch Entraxe tringles Paso trama	5,3 mm	
Dicke Gesamtgewebe Thickness Epaisseur Espesor	ca. 4 mm	
Gewicht Weight Poids Peso	ca. 6,9 kg/m ²	
Maximale Gewebebreite Maximum mesh width Largeur maximale Ancho máximo	8 m	
Standardbreite Standard mesh width Largeur standard Ancho standard	6 m	
Standardbefestigung Standard fixing detail Fixation standard Sujeción standard	Fusiomesh	



KO & CO BENELUX nv.
Showroom
Boomssesteenweg 41/10
B-2630 Aartselaar
Tel. (...32) (0)3 458 40 40
Fax (...32) (0)3 458 40 00
www.ko-co.com

GKD – GEBR. KUFFERATH AG
Metallweberstraße 46
52353 Düren
Germany
T +49 (0) 2421 803 - 0
F +49 (0) 2421 803 - 227
creativeweave@gkd.de
www.gkd.de